



ScanFuge Midi

Low speed centrifuge for IVF applications

Compact and robust solution for routine low-speed centrifugation



ORIGIO • SAGE • Humagen • TPC • K-Systems • RI • Wallace • LifeGlobal • CooperGenomics

ScanFuge Midi

- A unique autoclavable rotor centrifuge
- 6x15ml tubes – adaptors available for 3ml to 15ml
- Digital display setting: RPM/RCF and run-time with count down
- Automatic door release and alarms for imbalance, over-heat and over-speed

Specifications

Maximum speed: 4000RPM

Maximum RCF x g: 2075

Maximum Capacity: 6 x 15ml Fixed

Run-time: 99 min 59 sec or continuous

Acceleration time: ≤ 20 sec

Deceleration time: ≤ 20 sec

Program memory: 10

Dimensions (WxDxH): 296 x 412 x 206mm

Weight: 17.5kg (net) 18.7kg (gross)



Midi - 7.607.514.101 (220 V 50/60 Hz) / 7.607.514.801 (110 V 50/60 Hz)

Angle Rotors



7.601.111.070
6x15ml tubes
Includes 6 steel sleeves
GRA-15-6A



Sleeves



7.601.111.040
For 15ml tubes
GLB-15A-FA

Adaptors



7.601.113.030
For other 3ml




7.601.113.035
For other 4ml



7.601.113.040
For other 5ml


ScanFuge Midi Control Panel

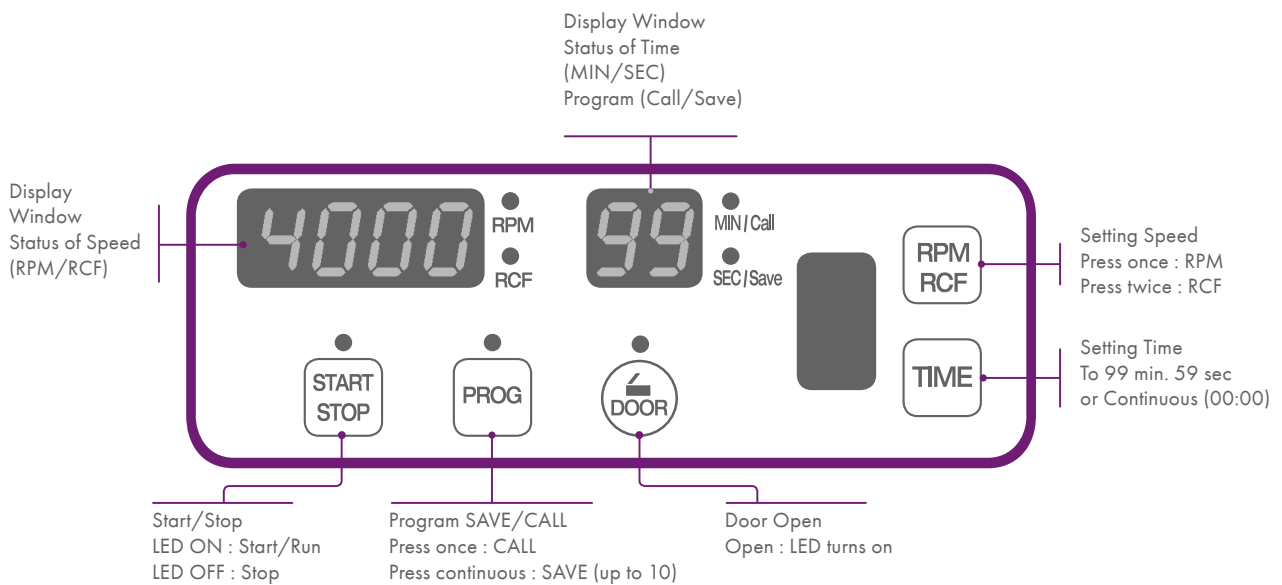

Train with CooperSurgical and optimize your performance, learn new skills and network with international peers.

We invite customers and partners to learn new techniques and share best practices in our fully equipped laboratories.

We provide evidence-based training by skilled, experienced embryologists which includes demonstrations and hands-on training in a comprehensive range of ART techniques and procedures.

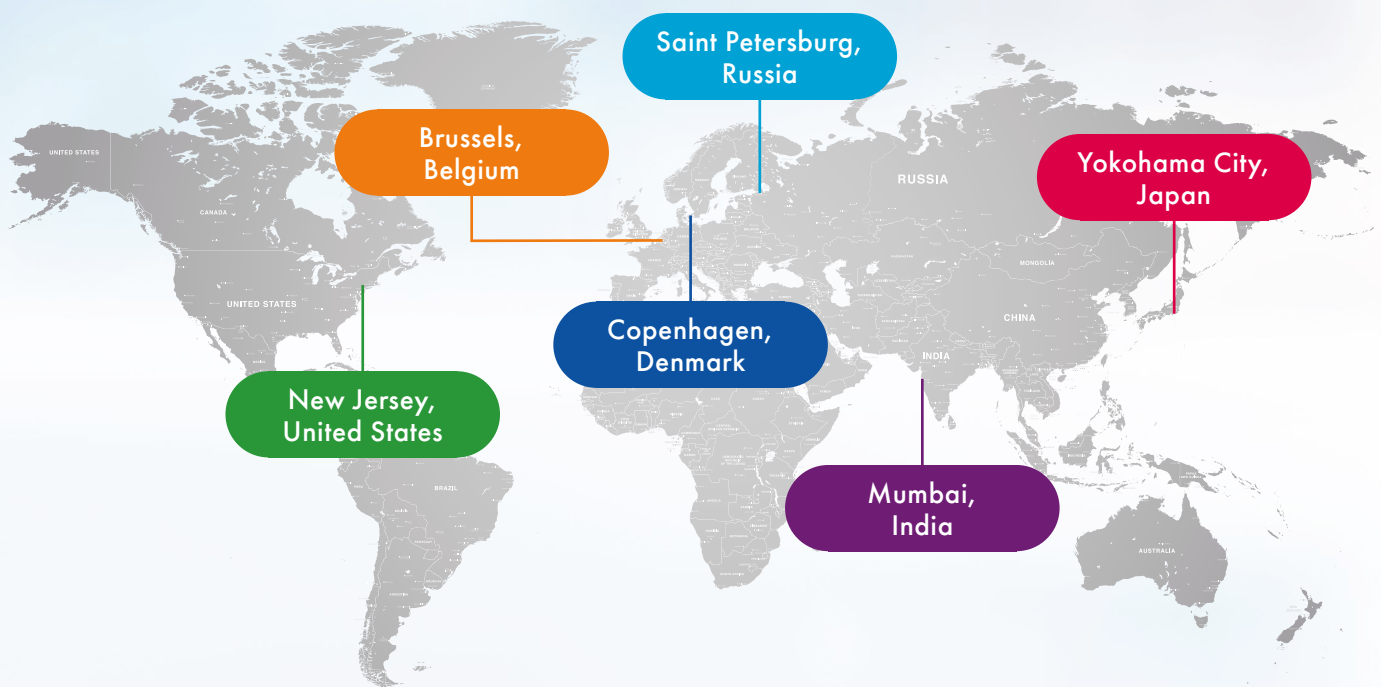

Availability of a device for clinical use is dependent on the regulatory approval status of that device within the country the device is intended to be sold into.